


A class Solid State  
High VSWR operation

Application : Radiated EMC

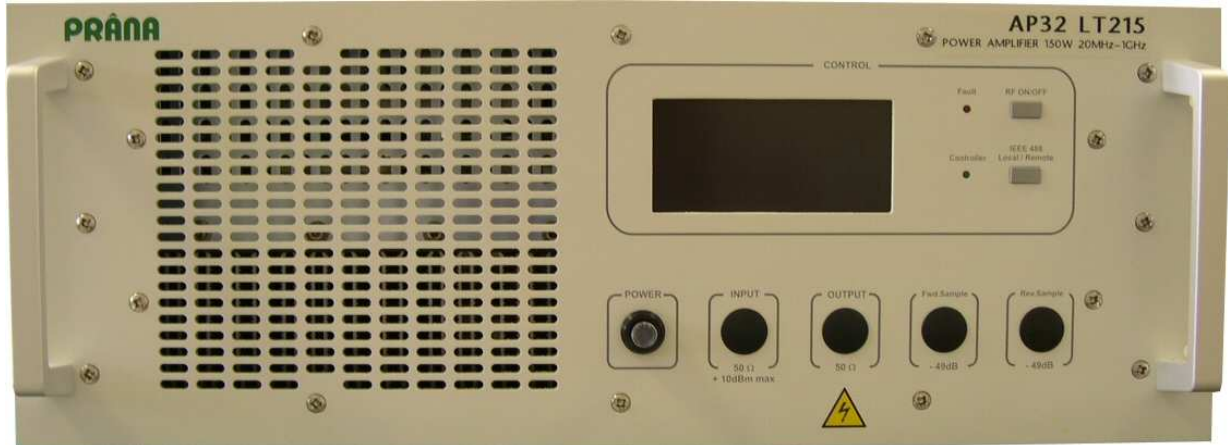

The AP32 MT215 power amplifier operates in a symmetric mode with high linearity capability. Solid state power modules are combined with high performance proprietary devices.


A high linear power is available and allows a high field output level with typical broadband antennas.

PRANA EMC amplifiers are designed to withstand excessive VSWR of typical EMC field generation environment.

The AP32 MT215 amplifier is compatible with any automatic test environment thanks to additional measurement and communication features.

The up to date and modern concept of the AP32 MT215 amplifier warrants the user of a permanent internal signal levels monitoring and allows local or remote full diagnostic capability.

AP32 LT215 POWER AMPLIFIER - 20MHz - 1000MHz - Typical Power

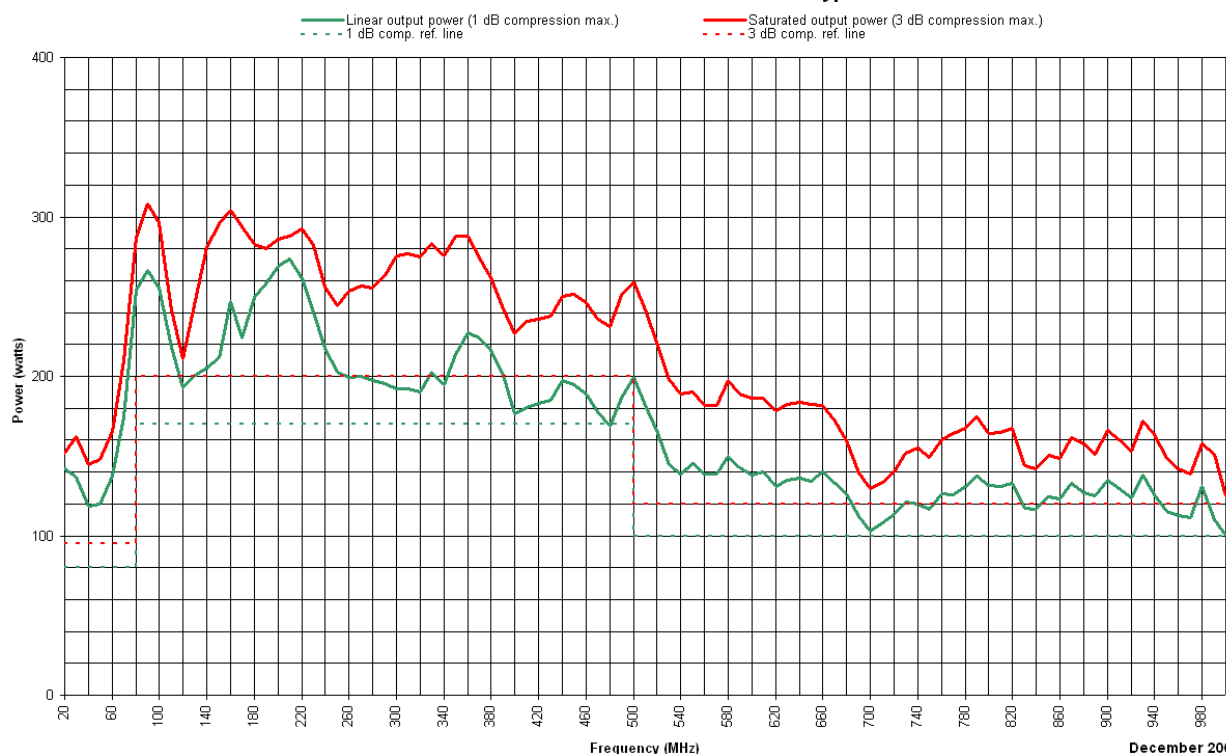

#### Output characteristics

Nominal power	150 W
Single Instantaneous range	20 – 1000 MHz
Power at 3 dB compression	95W min. up to 80MHz / 200 W min. up to 500 MHz / 120 W min. up to 1 GHz.
Power at 1 dB compression max.	80W up to 80MHz / 170W min. up to 500 MHz / 100 W min. up to 1 GHz
Gain	51 dB typ., 47 dB min.
Linear power gain flatness	± 2 dB typ., ± 3 dB max.
Nominal output load	50 Ohms
Reflected power on load mismatch	150 W reverse power without power protection
Harmonic distortion at 1dB compression or nominal power	< -20 dBc, -25 dBc typ..
Spurious	< -60 dBc
Noise figure	< 20 dB typ., 25 dB max.


#### Input characteristics

Input level for nominal output power	0 dBm typ.
Input impedance	50 Ohms
Input VSWR	2:1 max.
Maximum input level	+10 dBm

#### External interface

RF input connector (1)	Coaxial N fem.
RF output connector (1)	Coaxial N fem.
Incident power sample connector (2)	Coaxial N fem. (Option 001)
Reflected RF power sample connector (2)	Coaxial N fem. (Option 001)
Communication IEEE 488 GPIB	Option 002
Digital display	Yes
LED control indicator	Fault, Controller Ok
Forward and direct power display	Option 003
Manual controls	Power On/Off – menu key functions

#### Environment and Protections

Ambient temperature range in operation	0°C / +35°C
Storage ambient temperature range	-20°C / +70°C
Cooling	Air, 60 l/sec
Protections	Infinite VSWR, Temperature, Power Supply, Bias Voltage
EMC	 certified

#### Electrical characteristics

Supply voltage (3)	90-250 VAC, 47-63 Hz, Single phase
Nominal current	11.5 A at 100 V - 5 A at 230 V
Power in	< 1200 VA

#### Mechanical outline

Packaging	19" Rack
High ( standard)	178 mm (4U)
Width	450 mm
Depth	630 mm
Weight	45 kg

- (1) Front panel standard / Rear panel on request.
- (2) Rear panel standard / Front panel on request.
- (3) Other voltage or frequency on request.